


14x18mm Interchangeable Torque Wrench and Telescopic Ratchet Handle Set

A03ACS14 1/2

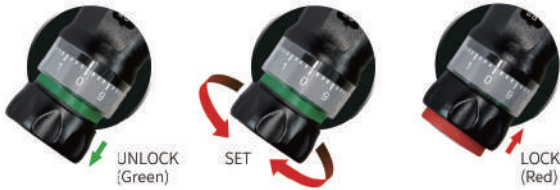

- Tool set for safe wheel changing lug nuts, 17, 19 and 21mm
- 14x18mm interchangeable window scale and quick green / red set torque wrench, 40-200Nm +/- 4%
- 14x18mm interchangeable and steplessly telescopic handle, 300-450mm

VDE Approved Insulated Window Scale Torque Wrench

A03A80030-1 3/8 6-30 Nm **A03A80060-1** 3/8 10-60 Nm
A03A80100-1 3/8 20-100 Nm **A03A80025-1** 3/8 5-25 Nm



- Tested and Certificated according to DIN EN IEC 60900 (VDE 0682-201):2019-04; EN IEC 60900:2018; DIN EN IEC 60900 Ber. 1 (VDE 0682-201 Ber. 1): 2020-11; EN IEC 60900:2018/AC:2020-05



Tool Boutique

Welcome to the world of @WERK. With more than 30 years of experience, @WERK is committed to the innovation of tools. Join the team of @WERK to create a better future.

智坊實業有限公司は2017年に設立し、工具の開発製造に邁進してきました。台湾での工具販売製造に関しては30年余の経験がございます。製造工程及び関連する専門知識を有し、主な顧客は欧州とアメリカにあります。日本とアジア市場の開拓を希望しております。信頼できるパートナーとして当社をぜひお選び下さい。



Rapid Dual Action Ratchet Handle

A023A601BRB $\frac{3}{8}$ **A023A601LBRB** $\frac{3}{8}$ Long
A024A601BRB $\frac{1}{2}$ **A024A601LBRB** $\frac{1}{2}$ Long



- Patented pull-back drive action drives sockets without winging handle
- Allows for rapid running of fasteners, when the space is confined
- Push-through ratchet design

Interchangeable & Steplessly Telescopic Tool Set

A024SCI201



- 14x18mm Interchangeable and Steplessly Telescopic Handle
- 300mm to 450mm
- Adjustable Wrench and Ratchet Fittings

Interchangeable & Steplessly Telescopic Tool Set

A024SCI202-1



- 14x18mm Interchangeable and Steplessly Telescopic Handle
- 300mm to 450mm
- Adjustable Wrench, Ratchet and Pipe Wrench Fittings

14X18mm Interchangeable Torque Wrench Set

A03ACS07



- 14x18mm interchangeable torque wrench, torque range: 20~110Nm
- Adjustable wrench fitting is slim jaws design with 38mm jaw width
- $\frac{3}{8}$ " ratchet dimensions with $\frac{1}{2}$ "Dr. long ratchet fitting, 72teeth

14X18mm Interchangeable Torque Wrench Set


A03ACS05



- 14x18mm interchangeable torque wrench, torque range: 40~210Nm
- Adjustable wrench fitting is slim jaws design with 38mm jaw width
- $\frac{1}{2}$ "Dr. long ratchet fitting, 72teeth

Preset Torque Wrench for Mini-Split Air Conditioning

A03A4AC05



- Preset torque setting, 18Nm (1/4"), 42Nm (3/8"), 55Nm (1/2") and 65Nm (5/8")
- Open-ended wrench size: 17mm (1/4"), 22mm (3/8"), 26mm (1/2"), 29mm (5/8")
- To ensure the accurate tightness of flare nuts

Digital 4-Quickset Torque Wrench for Mini-Split Air Conditioning


A03ACS16



- 4 color matching quickset buttons, 18Nm (yellow), 42Nm (black), 55Nm (red), 65Nm (white)
- Patent pending color matching design, 17mm-yellow, 22mm-black, 26mm-red, 29mm-white

4-Preset Torque Wrench for Mini-Split Air Conditioning

A03ACS06



- 4 quickset torque setting, 18Nm(1/4"), 42Nm (3/8"), 55Nm (1/2") and 65Nm (5/8")
- Patent pending color matching design, yellow-17mm, black-22mm, red-26mm, white-29mm

Torque Wrench for Mini-Split Air Conditioning


A03ACS01



- Torque range: 10~80Nm, tolerance: +/-4%
- 14x18mm rectangular fitting usage
- Adjustable wrench fitting is slim jaws design with 38mm jaw width

4- Preset Torque Wrench for Mini-Split Air Conditioning

A03ACS12



- 4 quickset torque setting, 18Nm (1/4"), 42Nm (3/8"), 55Nm (1/2") and 65Nm (5/8")
- Patent pending color matching design, yellow-17mm, black-22mm, red-26mm, white-29mm

5-Preset Torque Wrench for Lug Nut Changing

A03A4TC01 ^{1/2}



- 5 section patented quickset adjustable torque setting within one turn, 88Nm (65 lbs-ft), 108Nm (80 lbs-ft), 135Nm (100 lbs-ft), 163Nm (120 lbs-ft)
- Patent pending color matching design, yellow-88Nm, blue-108Nm, grey-135Nm, white-163Nm and light blue-190Nm

3pcs Low Profile Socket Adapter Set

B03DAS02PBX



- These unique socket adapters allow you to reduce the drive of your sockets without increasing your tool height.
- Sizes: 1/4"(F) x 3/8"(M), 3/8"(F) x 1/2"(M), 1/2"(F) x 3/4"(M)
- These adapters feature a magnet retention device to keep them attached to the socket

Power Rivet and Rivet Nut Attachment

C13GA002



- 3.2-4.0-4.8-6.4mm Blind Rivets, Aluminum, Steel and Stainless Steel available
- Drill, Drill / Driver and Impact Driver available
- MAX. Turning Speed: 1,800 RPMS

C13GB001



- M4-M5-M6-M8-M10 Rivet Nuts, Aluminum, Steel
- M4-M5-M6-M8 Rivet Nuts, Stainless Steel available
- Drill, Drill / Driver and Impact Driver available
- MAX. Turning Speed: 1,800 RPMS

Preset Torque Screwdriver for TX / TX+ Screws of Indexable Cutting Tools

TX

A03BPTSTX01	TX6	A03BPTSTXS01	6IP
A03BPTSTX02	TX7	A03BPTSTXS02	7IP
A03BPTSTX03	TX8	A03BPTSTXS03	8IP
A03BPTSTX04	TX9	A03BPTSTXS04	9IP
A03BPTSTX05	TX10	A03BPTSTXS05	10IP
A03BPTSTX06	TX15	A03BPTSTXS06	15IP

TX+



Non-Slip Tip



TX6 and 6IP



TX9 and 9IP



TX7 and 7IP



TX10 and 10IP



TX8 and 8IP



TX15 and 15IP



- Over torque limiting clutch
- Correct tightening of precision fasteners, for example in CNC machines, at 0.6, 0.9, 1.2, 1.4, 2.0, 3.0 Nm torque values clockwise only

Hand Swivel Impact Bar

D04IB402 1/2



- Produces much higher torque with each hammer blow
- Bi-directional - use to loosen or tighten fasteners
- Swivel head aids with operation in limited access situations

CAUTION

1. Check the impact driver in the right driving direction before usage
2. Don't use leverage with hammer blow before the bolt is loosened

@WERK



A Werk Enterprise Co., Ltd.

13F, No. 536-12, Dajin St., Taichung City 408, Taiwan
TEL: 886-4-2329 3727 FAX: 886-4-2256 9664

Email: info@a-werk.com.tw

Web: www.a-werk.com.tw